


## Mechanical Drawing

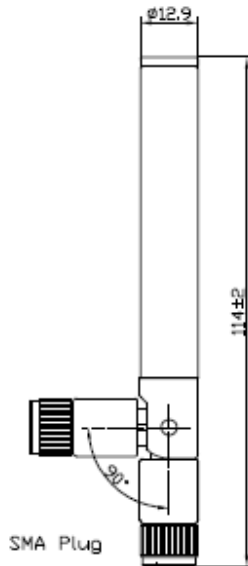

Unit: mm

## Electrical Specification

|                        |            |
|------------------------|------------|
| <b>Frequency Range</b> | 900~940MHz |
| <b>Impedance</b>       | 50Ω        |
| <b>V.S.W.R.</b>        | ≤2.0       |
| <b>Radiation</b>       | Omni       |
| <b>Gain</b>            | 2dBi       |
| <b>Polarization</b>    | Vertical   |

## Mechanical Specification

|                       |                    |
|-----------------------|--------------------|
| <b>Connector Type</b> | SMA Plug (Brass)   |
| <b>Material</b>       | PC                 |
| <b>Cable</b>          | --                 |
| <b>Bushing Type</b>   | Swivel 0°,45°, 90° |
| <b>Length</b>         | 114mm              |
| <b>Water Proof</b>    | IP67               |
| <b>Weight</b>         | 16g (est.)         |

## Environmental Specification

|                       |                 |
|-----------------------|-----------------|
| <b>Operating Temp</b> | - 40°C ~ + 85°C |
| <b>Storage Temp</b>   | - 30°C ~ + 70°C |
| <b>Substance</b>      | RoHS Compliance |

