


Mechanical Drawing

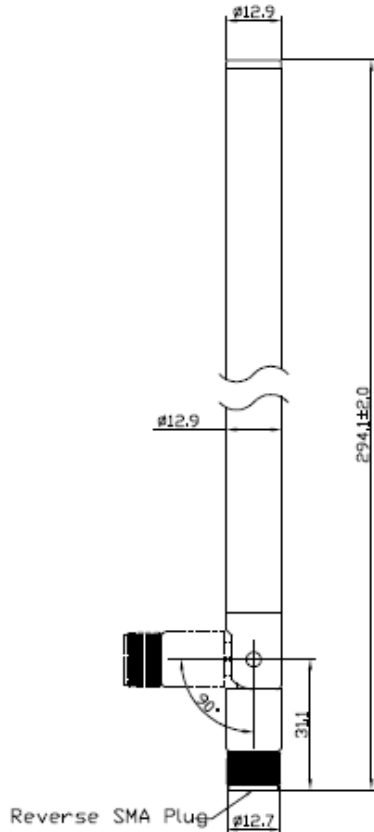

Unit: mm

Electrical Specification

| | |
|------------------------|---------------|
| Frequency Range | 2.4~2.4835GHz |
| Impedance | 50Ω |
| V.S.W.R. | ≤2.0 |
| Radiation | Omni |
| Gain | 7dBi |
| Polarization | Vertical |

Mechanical Specification

| | |
|-----------------------|--------------------------|
| Connector Type | Reverse SMA Plug (Brass) |
| Material | PC |
| Cable | -- |
| Bushing Type | Swivel 0°,45°, 90° |
| Length | 294mm |
| Water Proof | IP67 |
| Weight | 45g (est.) |

Environmental Specification

| | |
|-----------------------|-----------------|
| Operating Temp | - 40°C ~ + 85°C |
| Storage Temp | - 30°C ~ + 70°C |
| Substance | RoHS Compliance |

