


Mechanical Drawing

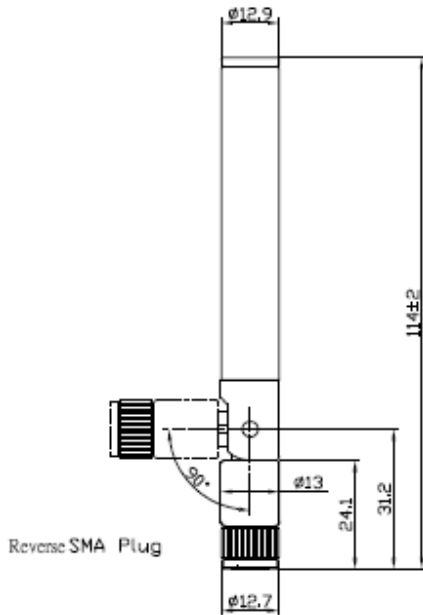

Unit: mm

Electrical Specification

Frequency Range	2.4~2.4835GHz
Impedance	50 Ω
V.S.W.R.	≤ 2.0
Radiation	Omni
Gain	2dBi
Polarization	Vertical

Mechanical Specification

Connector Type	Reverse SMA Plug (Brass)
Material	PC
Cable	--
Bushing Type	Swivel 0°, 45°, 90°
Length	114mm
Water Proof	IP67
Weight	16g (est.)

Environmental Specification

Operating Temp	- 40°C ~ + 85°C
Storage Temp	- 30°C ~ + 70°C
Substance	RoHS Compliance

