


Mechanical Drawing

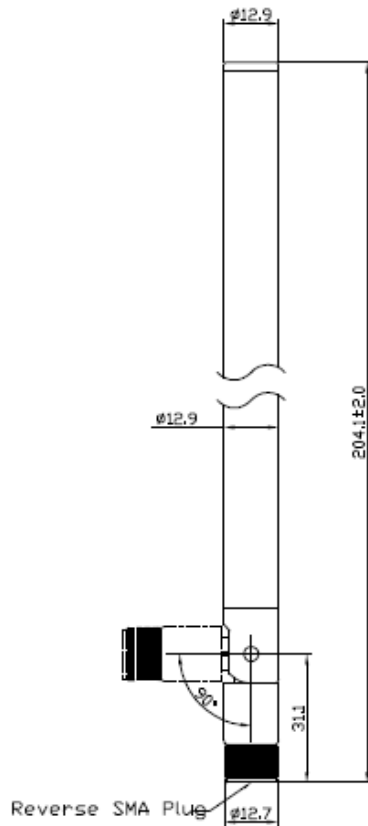

Electrical Specification

Frequency Range	890~960/1710~1990MHz
Impedance	50 Ω
V.S.W.R.	≤ 2.0
Radiation	Omni
Gain	2dBi
Polarization	Vertical



Mechanical Specification



Connector Type	Reverse SMA Plug (Brass)
Material	PC
Cable	--
Bushing Type	Swivel 0°, 45°, 90°
Length	204mm
Water Proof	IP67
Weight	31g (est.)

Environmental Specification

Operating Temp	- 40°C ~ + 85°C
Storage Temp	- 30°C ~ + 70°C
Substance	RoHS Compliance

Unit: mm

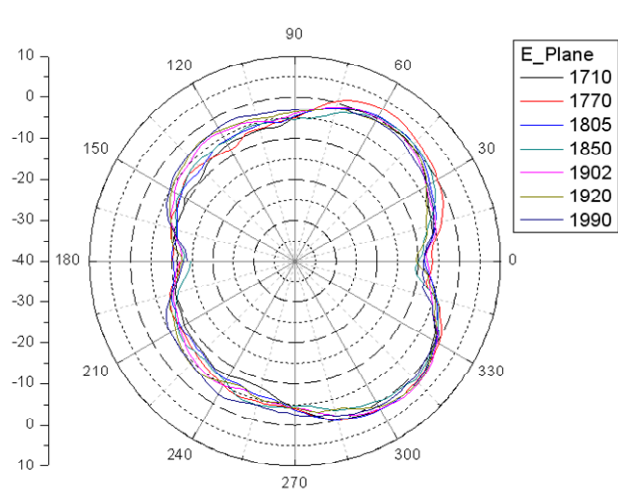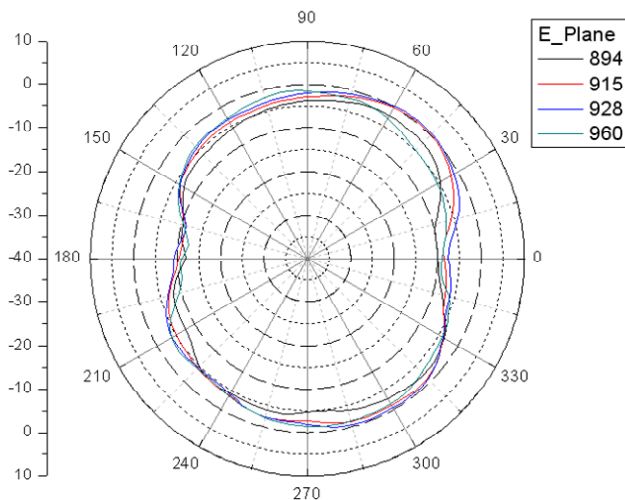

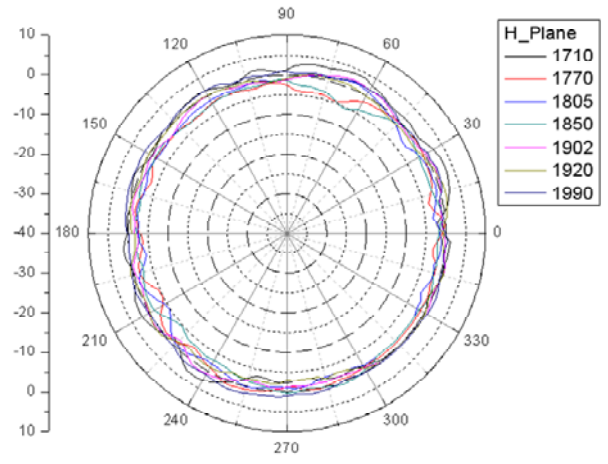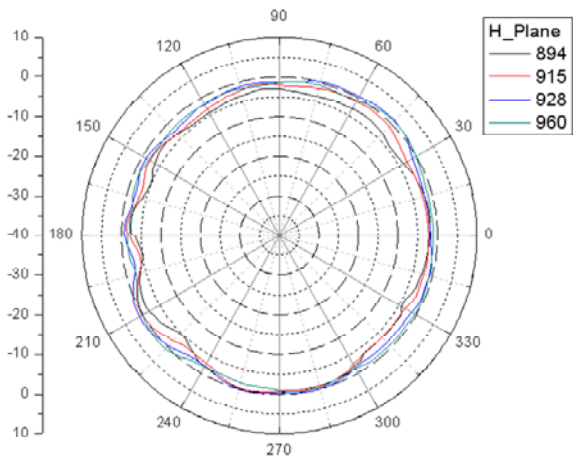

2375 Zanker Rd., #240, San Jose, CA 95131 Phone: 408 383-0688 Fax: 408 383-0388