


Mechanical Drawing

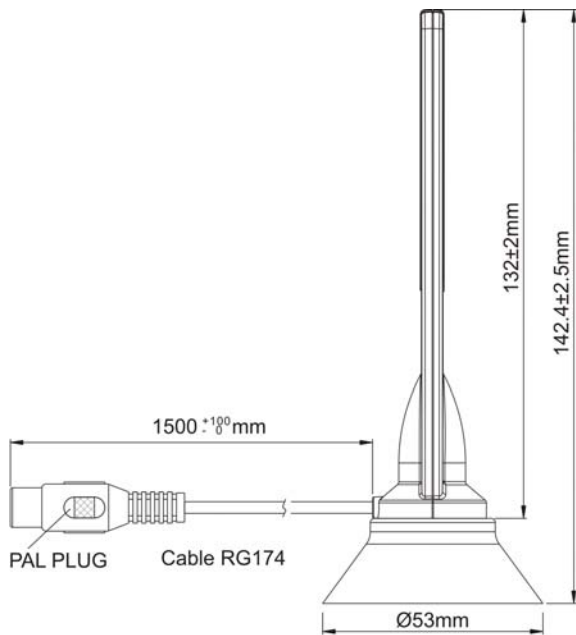

Unit: mm

- Accessories:
- CX-USF0DCF0Z0100(USBCableAss'y) *1pcs
 - AD-USE0-ADX0-201(ACPowerAdapter) *1pcs
 - AD-PAE0-PAF0-201(LNAAAdapter) *1pcs

Electrical Specification

Frequency Range	470~870MHz
Impedance	75Ω
V.S.W.R.	≤ 3.0
Radiation	Omni
Gain	2dBi
Polarization	Vertical

Mechanical Specification

Connector Type	PAL Plug (Brass)
Material	PC
Cable	1.5C-2V (1500mm)
Bushing Type	--
Dimension	142mm
Weight	65g (est.)

Environmental Specification

Operating Temp	- 20°C ~ + 65°C
Storage Temp	- 20°C ~ + 70°C
Substance	Meets RoHs requirement

