


### Mechanical Drawing

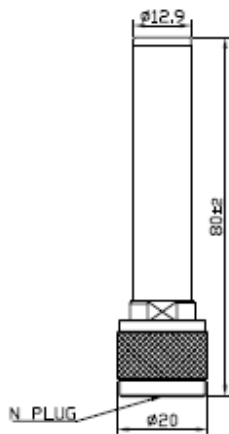

Unit: mm

### Electrical Specification



<b>Frequency Range</b>	2.4~2.4835/5.15~5.85GHz
<b>Impedance</b>	50Ω
<b>V.S.W.R.</b>	≤2.0
<b>Radiation</b>	Omni
<b>Gain</b>	2/2dBi
<b>Polarization</b>	Vertical



### Mechanical Specification

<b>Connector Type</b>	N Plug (Brass)
<b>Material</b>	PC
<b>Cable</b>	--
<b>Bushing Type</b>	Straight
<b>Length</b>	80mm
<b>Water Proof</b>	IP67
<b>Weight</b>	36g (est.)

### Environmental Specification

<b>Operating Temp</b>	- 40°C ~ + 85°C
<b>Storage Temp</b>	- 30°C ~ + 70°C
<b>Substance</b>	RoHS Compliance

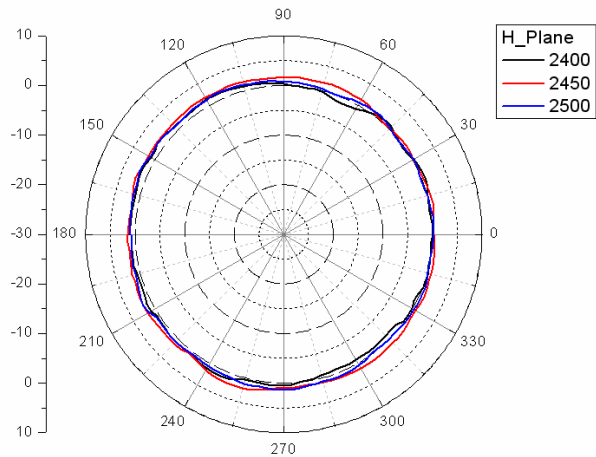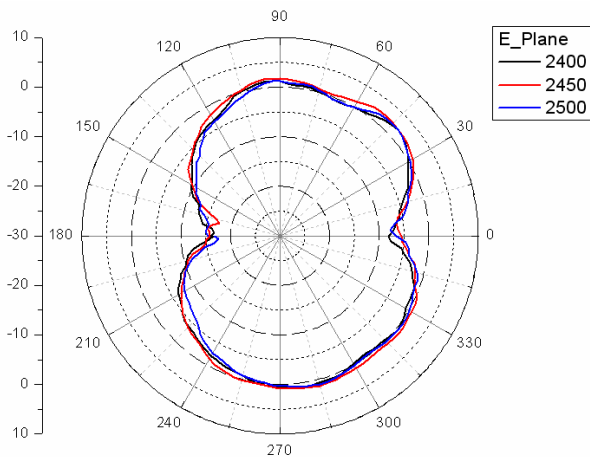

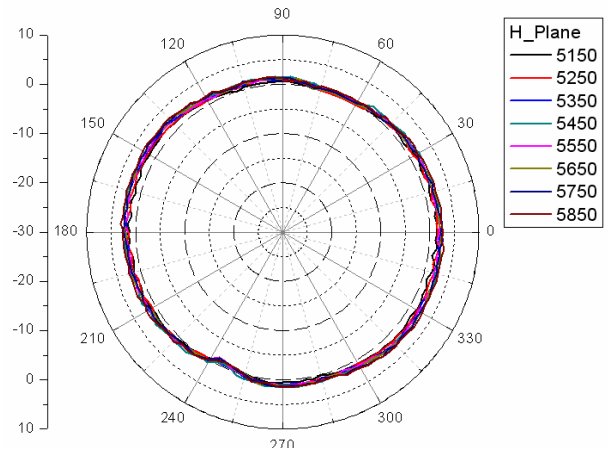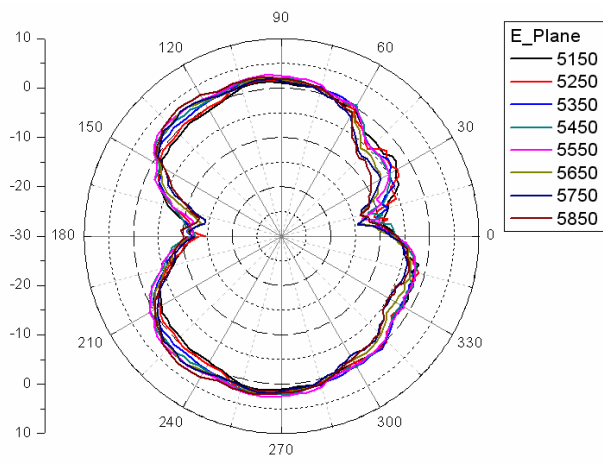

2375 Zanker Rd., #240, San Jose, CA 95131 Phone: 408 383-0688 Fax: 408 383-0388